


80G	
Traction force-inner diameter	80 kN
Traction force-outer diameter	50 kN
Wire rope medium speed	0,48 m/s 540 min ⁻¹ 0,9 m/s 1000 min ⁻¹
Wire rope (serial)*	80 m / 13 mm
Wire drum capacity	115 m / 13 mm
	125 m / 12 mm
Theoretical tear force of wire rope	178,32 kN
Recommended tractor power	> 74 kW
Measures	
A	1920 mm
B	930 mm
C	1300 mm
D	2300 mm
Weight without wire rope	770 kg
Lower pulley	x
Trailer coupling	x
Holder for chainsaw	■
Picaxe holder	■
Storage for choker chains	■
Unwinding device for wire rope	■
PTO shaft revolutions	540-1000 min ⁻¹
Steering	H

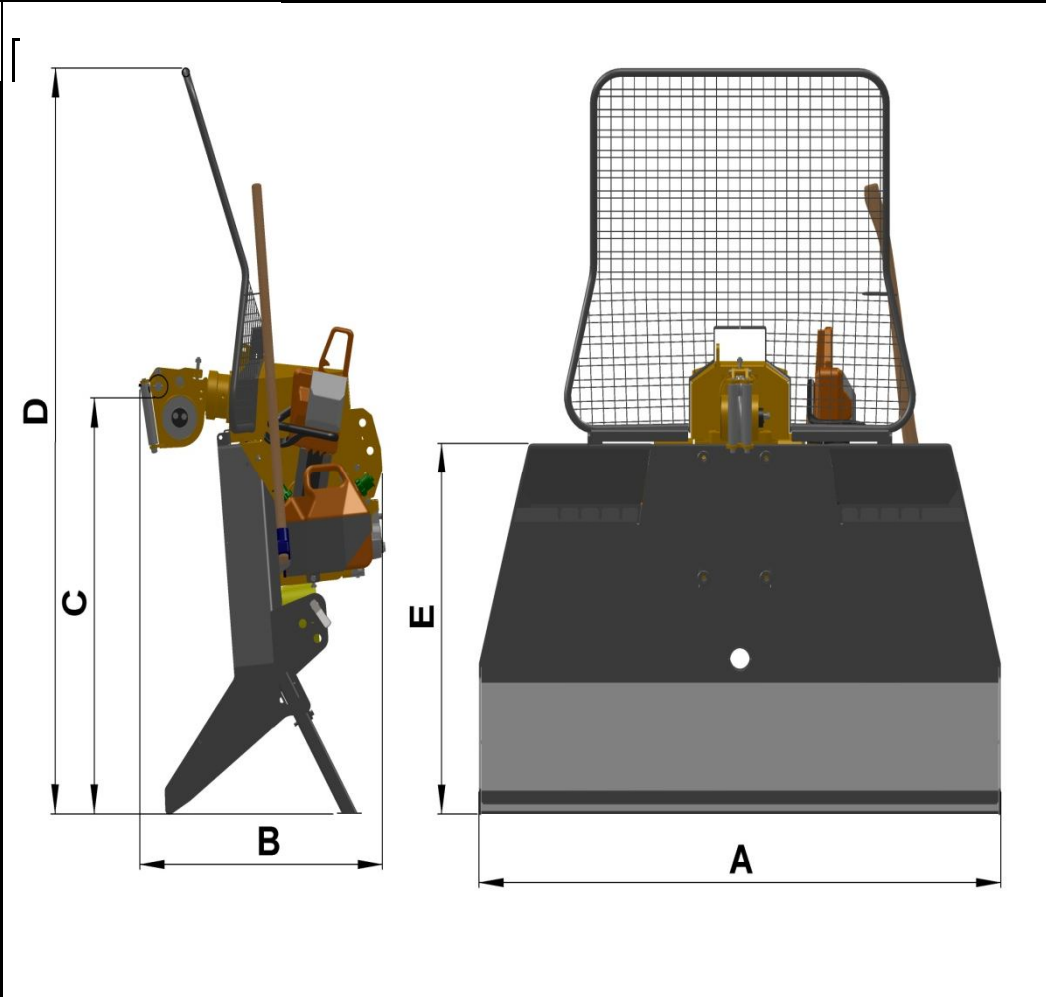

■-serial, □-option, x-not possible, * wire rope 2160N/mm²-strongly calibrated 6x25