


## ELECTRO HYDRAULIC WINCHES

| Technical data                 |               | Unit  |                |                |                |         |         |                |         |
|--------------------------------|---------------|-------|----------------|----------------|----------------|---------|---------|----------------|---------|
| Typ                            |               |       | 45H            | 55H            | 55H pro        | 65H     | 65H pro | 85H            | 85H pro |
| Pulling force                  |               | kN    | 45             | 55             | 55             | 65      | 65      | 85             | 85      |
| Wire rope medium speed         |               | m/s   | 0,6            | 0,6            | 0,6            | 0,6     | 0,6     | 0,6            | 0,6     |
| Wire rope length/Diameter      | Max. (theory) | m/mm  | 150/9          | 120/10         | 120/10         | 165/10  | 165/10  | 150/11         | 150/11  |
|                                |               | m/mm  | 120/10         | 105/11         | 105/11         | 135/11  | 135/11  | 128/12         | 128/12  |
|                                |               | m/mm  | 105/11         | 95/12          | 95/12          | 115/12  | 115/12  | 105/13         | 105/13  |
|                                | Serial        | m/mm* | 70/10          | 70/11          | 70/11          | 80/12   | 80/12   | 90/13          | 90/13   |
| Recommended tractor power      |               | kW    | 37-50          | 40-55          | 40-55          | 45-70   | 45-70   | 50-100         | 50-100  |
|                                |               | PS    | 50-68          | 54-75          | 54-75          | 61-95   | 61-95   | 68-136         | 68-136  |
| A                              | mm            | 1400  | 1590<br>□ 1800 | 1590<br>□ 1800 | 1685<br>□ 1800 | 1800    | 1800    | 1800<br>□ 2000 | 2000    |
| B                              | mm            | 490   | 490            | 490            | 750            | 750     | 750     | 750            | 750     |
| C                              | mm            | 1335  | 1450           | 1450           | 1690           | 1690    | 1690    | 1690           | 1690    |
| D                              | mm            | 2000  | 2300           | 2300           | 2300           | 2300    | 2300    | 2300           | 2300    |
| Weight without wire rope       |               | kg    | 381            | 395            | 414            | 560     | 580     | 595            | 622     |
| Device for unwinding wire rope |               |       | x              | □              | ■              | □       | ■       | □              | ■       |
| Lower pulley                   |               |       | ■              | ■              | ■              | ■       | ■       | ■              | ■       |
| Trailer coupling               |               |       | ■              | ■              | ■              | ■       | ■       | ■              | ■       |
| Chainsaw holder                |               |       | ■              | ■              | ■              | ■       | ■       | ■              | ■       |
| Triple plate clutch            |               |       | ■              | ■              | ■              | ■       | ■       | ■              | ■       |
| Steering                       |               |       | H              | H              | H              | H       | H       | H              | H       |
| Connection                     |               |       | I, II          | I, II          | I, II          | II, III | II, III | II, III        | II, III |

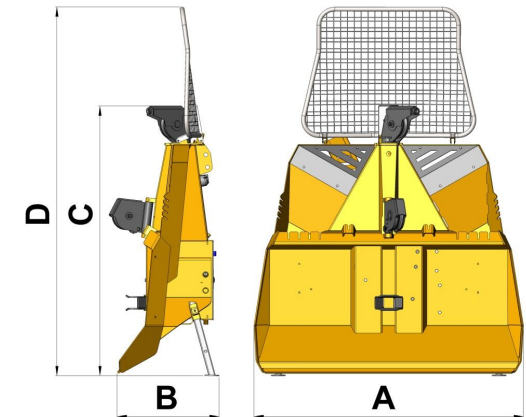

Legend: ■ Serial, □ Option, x not possible, H electro hydraulic, \* wire rope 2160 N/mm<sup>2</sup>-strongly calibrated 6x25