


Mechanical Winches SERIES M

Technical data		Unit						
Typ			45M	45MR	55M	55MR	65M	85M
Pulling force		kN	45	45	55	55	65	85
Wire rope medium speed		m/s	0,9	0,6	0,9	0,6	0,6	0,6
Wire rope length/diameter	Max. (theory)	m/mm	150/9	150/9	120/10	120/10	165/10	150/11
		m/mm	120/10	120/10	105/11	105/11	135/11	128/12
		m/mm	105/11	105/11	95/12	95/12	115/12	105/13
	Serial	m/mm*	70/10	70/10	70/11	70/11	80/12	90/13
Recommended tractor power		kW	37-50	37-50	40-55	40-55	45-70	50-100
		HP	50-68	50-68	54-75	54-75	61-95	68-136
Measurements	A	mm	1400	1400	1590	1590	1685	1800
	B	mm	490	490	490	490	750	780
	C	mm	1335	1335	1450	1450	1690	1690
	D	mm	2000	2000	2300	2300	2300	2300
Weight without wire rope		kg	348	366	388	406	526	563
PTO shaft revolutions		min ⁻¹	540	540	540	540	540	540
Trailer coupling			■	■	■	■	■	■
Lower pulley			■	■	■	■	■	■
Holder for chainsaw			■	■	■	■	■	■
Picaxe holder			■	■	■	■	■	■
More-bladed clutch			■	■	■	■	■	■
Steering			M	M	M	M	M	M
Connection (category)			I, II	I, II	I, II	I, II	II, III	II, III

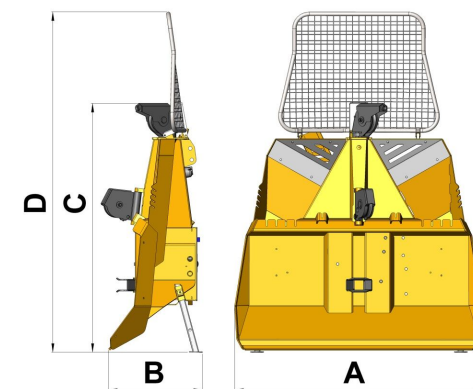

■-serial, □-option, x-not possible, M-mechanical, * wire rope 2160 N/mm²-strongly calibrated 6x25